



ENTRY LEVEL FRAMING AND FOUNDATION PLAN

3/16" ± 1'-0"


FOUNDATION NOTES:

1. DATUM ELEVATION 100'-0" EQUALS FLOOR SLAB ELEVATION. REFER TO CIVIL ENGINEER'S DOCUMENTS FOR ACTUAL ELEVATION.
2. [XXX'-X"] INDICATES TOP OF FOUNDATION WALL ELEVATION.
3. (XXX'-X") INDICATES TOP OF FOOTING ELEVATION.
4. CONTRACTOR SHALL FOLLOW ALL REQUIREMENTS LISTED IN SOILS REPORT.
5. FLOOR ELEVATIONS SHOWN ARE AT TOP OF SLAB OR AT TOP OF PLYWOOD FLOOR SHEATHING.
6. FOOTING ELEVATIONS SHOWN ARE MAXIMUMS AND MAY NEED TO BE LOWERED DUE TO SOIL CONDITIONS. VERIFY CHANGES WITH STRUCTURAL ENGINEER.
7. PLACE SLAB ON GRADE ON STRUCTURAL COMPACTED FILL OR NATURAL GRADE AS OUTLINED IN SOILS REPORT.
8. UNLESS OTHERWISE NOTED - ALL SLAB ON GRADES ARE 4" THICK PROVIDE CONTROL JOINTS OR CONSTRUCTION JOINTS AS SHOWN ON FOUNDATION PLAN. MAXIMUM SIZE OF EACH AREA SHALL NOT EXCEED 144 FT².
9. CONTRACTOR TO COORDINATE ALL DIMENSIONS AND DETAILS WITH ARCHITECTURAL DRAWINGS.
10. CENTER FOOTINGS UNDER WALLS AND COLUMNS UNLESS DIMENSIONED OTHERWISE ON FOUNDATION PLAN.
11. REFER TO ARCHITECTURAL DRAWINGS FOR STAIR FRAMING DETAILS AND LANDING SLAB ELEVATIONS.

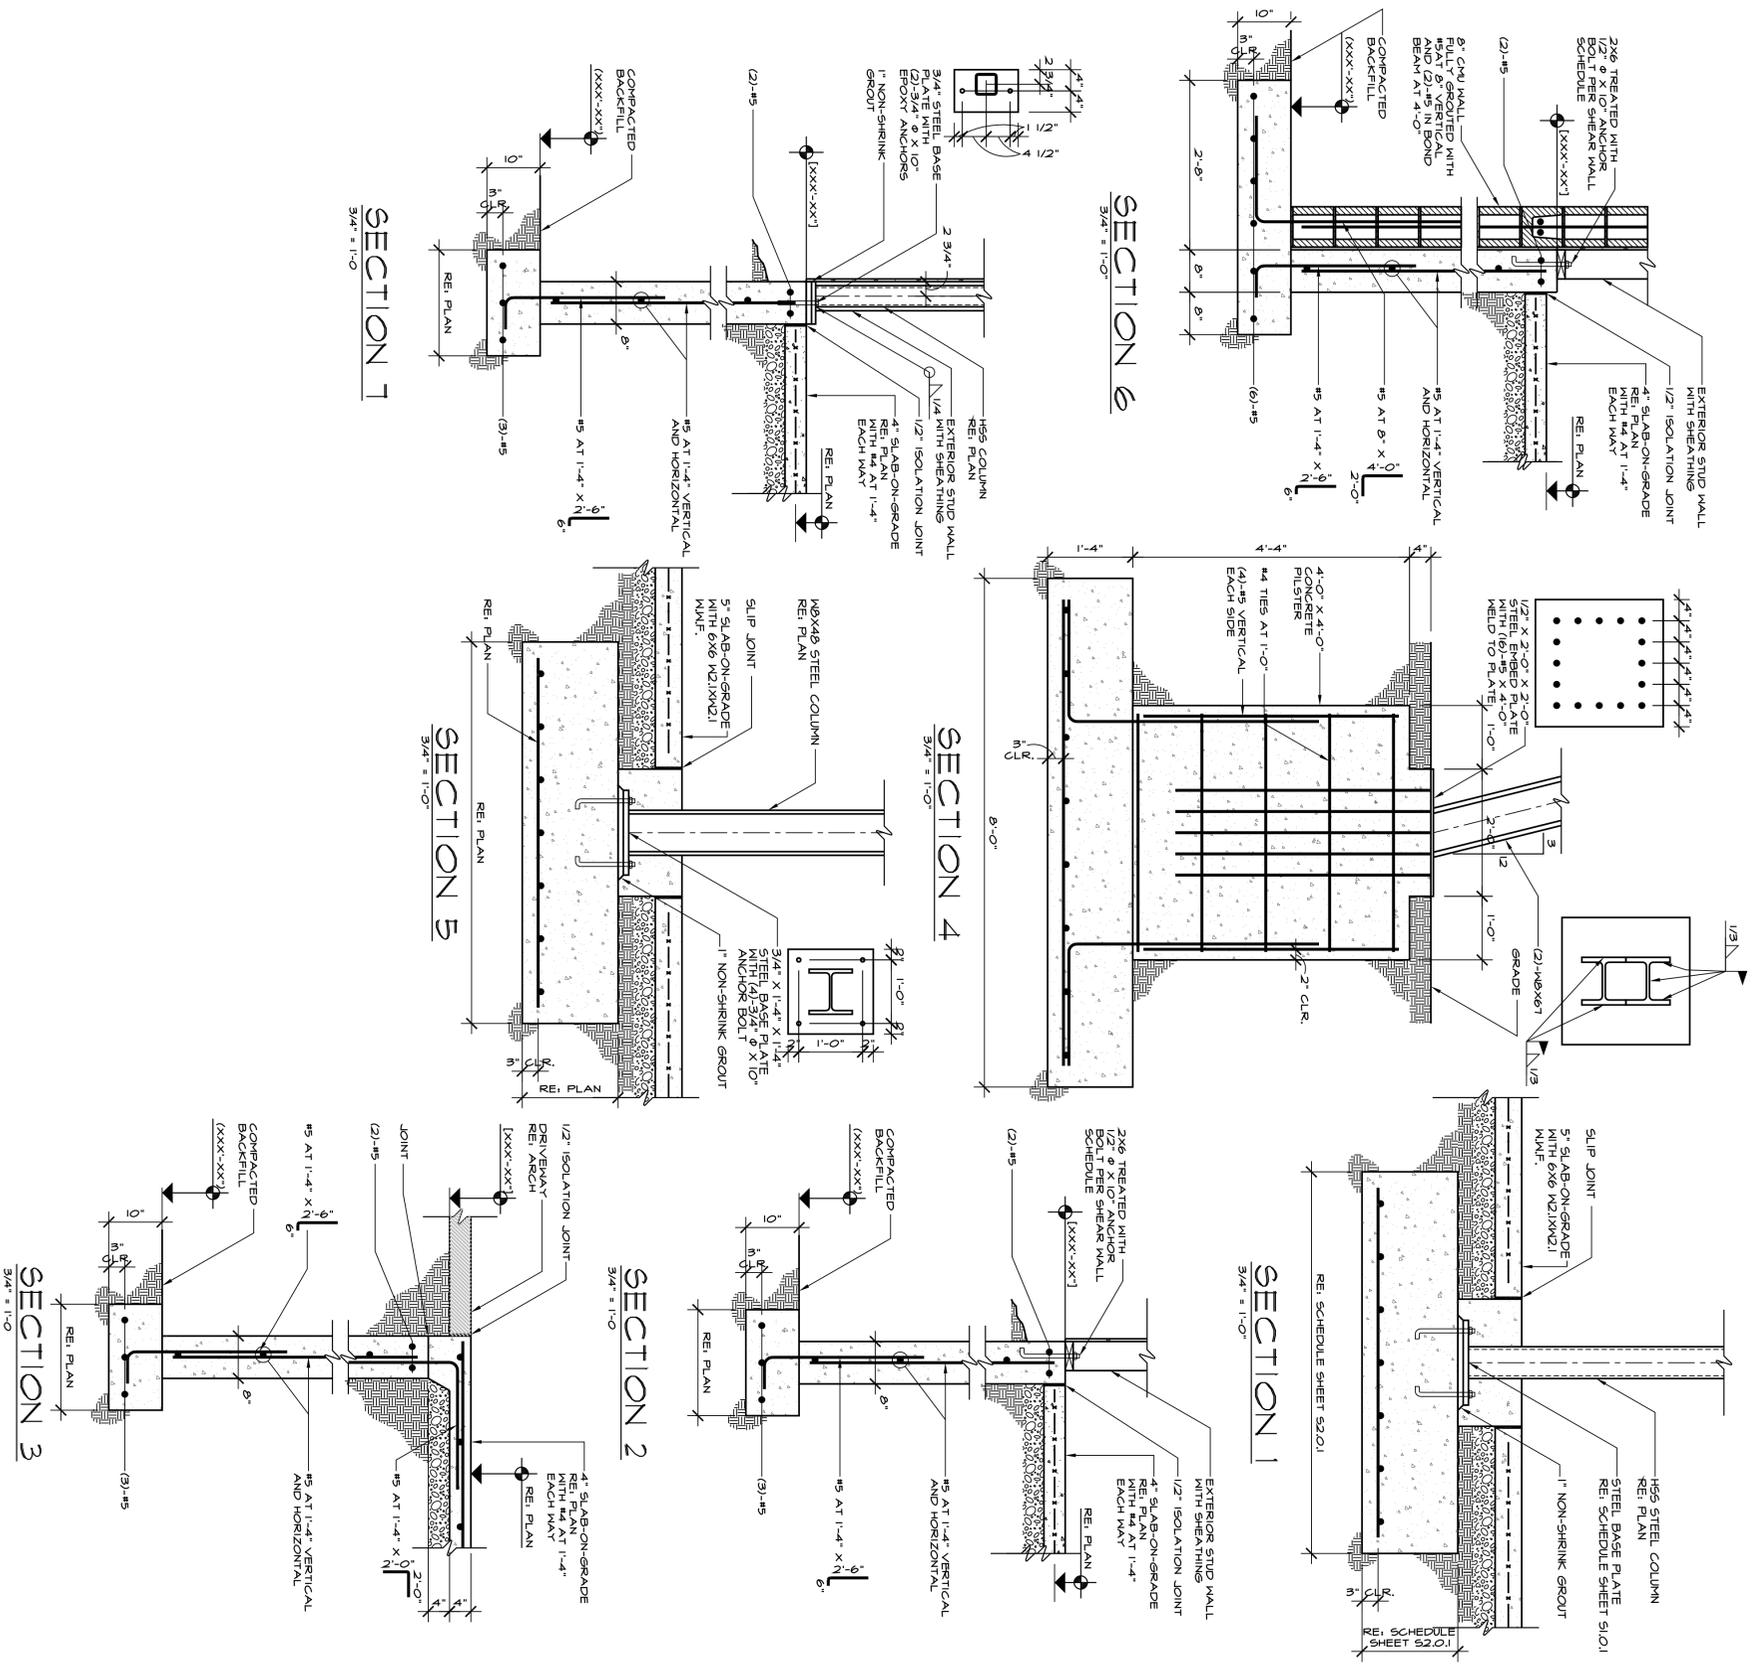


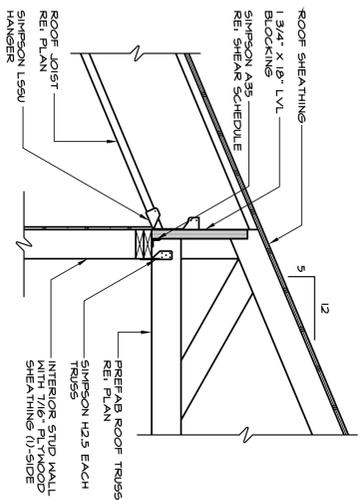


SECTION 7
3/4" = 1'-0"

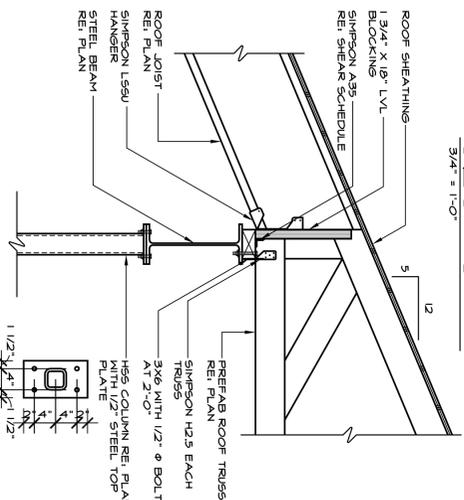


SECTION 8
3/4" = 1'-0"

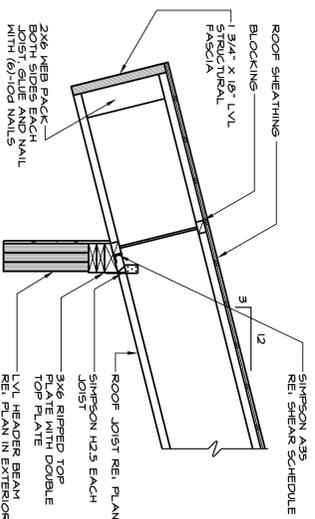


SECTION 4
3/4" = 1'-0"

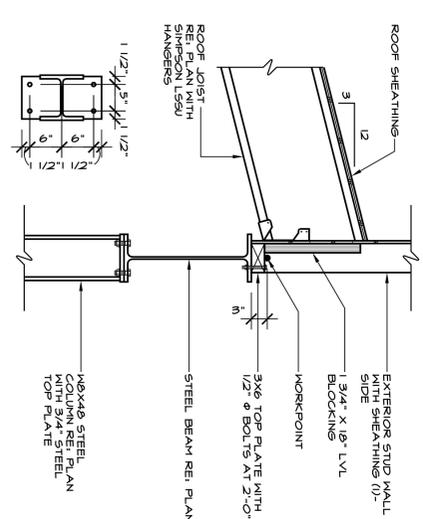


SECTION 5
3/4" = 1'-0"

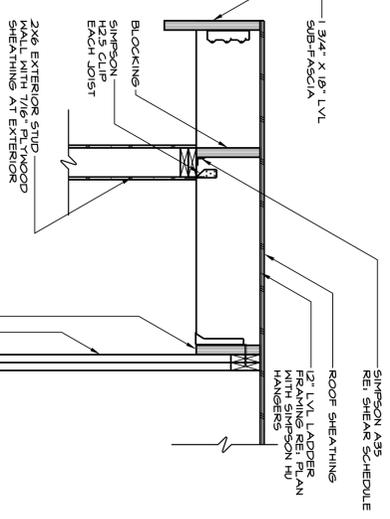


SECTION 1
3/4" = 1'-0"

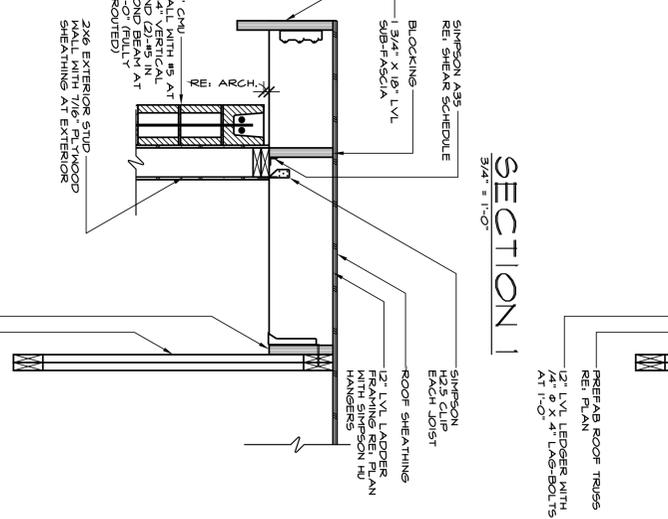

SECTION 2
3/4" = 1'-0"

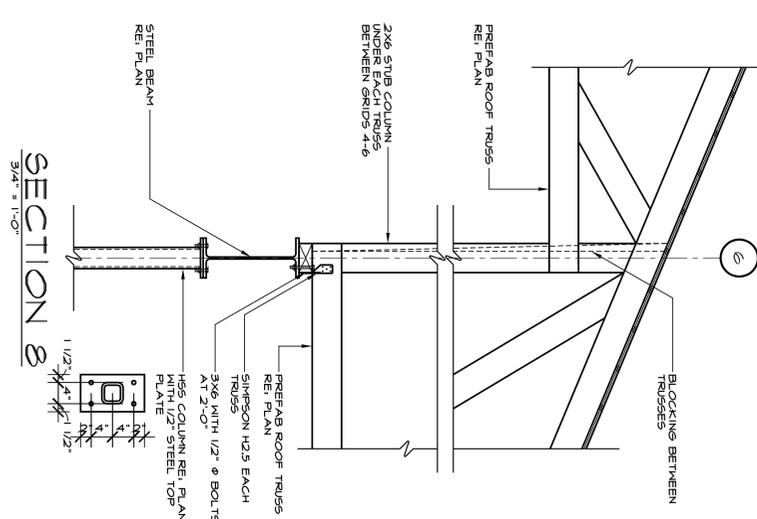

SECTION 8
3/4" = 1'-0"

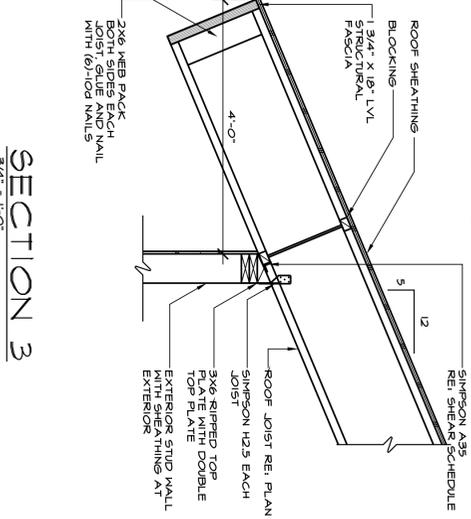

SECTION 3
3/4" = 1'-0"